


Product name: Swift Z



Wireless



250m+



Ultra-low
Latency



5.5" Touch Screen



HDMI



Dual Battery Slot



Custom
3D LUT



Power for
Camera



FULL HD

Description

The Swift Z is a kit of 5.5" touch-screen monitors with built-in wireless modules. Being accessible and deployment-friendly, it will definitely make monitoring much easier. It is also compatible with a wide variety of cameras.

The Swift Z has an edge over similar products in being much more professional and convenient. Above all, it delivers a panoply of fantastic features and can be used for film & TV productions, live streaming, weddings, and so on. The Swift Z is a must-have item for video production teams.

Included in the package

- 1 Wireless monitor (TX 7109)
- 1 Wireless monitor (RX 3109)
- 2 Sunhoods
- 1 HDMI cable
- 4 Antennas
- 1 Cold Shoe Mount
- 1 USB Type-C adaptor
- 1 Manual




Key features

- 5.5" touch-screen monitors with built-in wireless modules.
- The transmitter end can be used as an on-camera HDMI monitor and the receiver end as a director monitor.
- Ultra-low Latency ≤ 70 ms.
- Transmission range up to 250m/800ft at 1080p60Hz.
- Selectable channels to minimize interference.
- Supports HDMI input/output & audio output.
- Supports HDR, 3D LUT import & professional video analysis functions.
- Supports dual battery and even reverse-charging for another device.
- Supports 500 nits of brightness.
- Pocket-sized and user-friendly.

Transmitter: TX 7109

Receiver: RX 3109

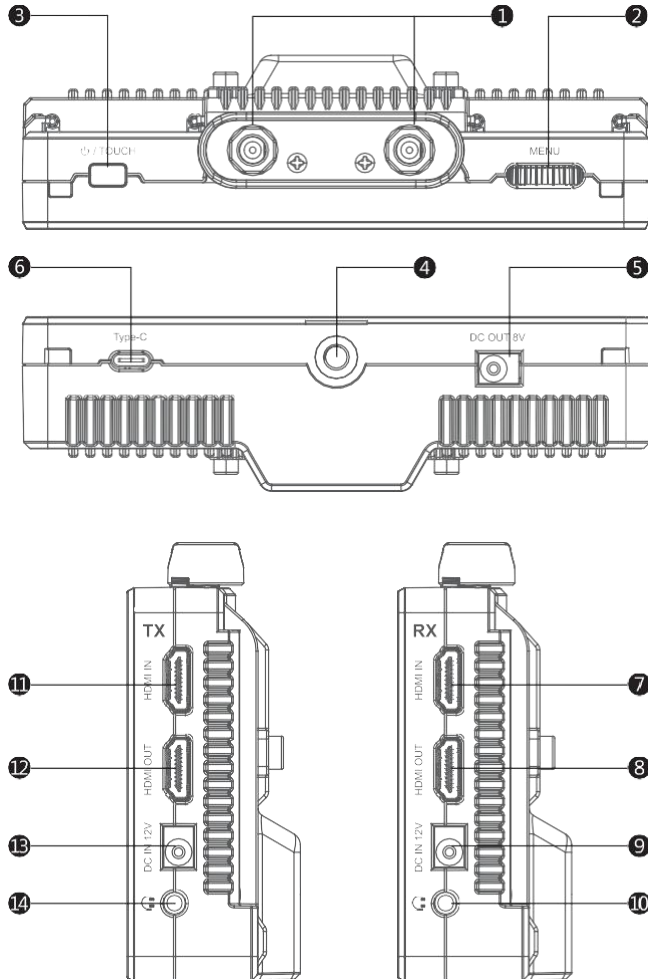

- ① Antenna port
- ② Menu
- ③ Power & Touch off Switch
- ④ 1/4"-20 thread point
- ⑤ DC OUT 8V
- ⑥ Type-C
- ⑦ HDMI IN
- ⑧ HDMI OUT
- ⑨ DC IN 12V
- ⑩ Audio output
- ⑪ HDMI IN
- ⑫ HDMI OUT
- ⑬ DC IN 12V
- ⑭ Audio output

Technical specifications

Item	Data
Screen Size	5.5" touch screen
Resolution	1920 × 1080
Frequency	5.1 ~ 5.9(GHz)
Audio Format	PCM
Latency	70ms
Video Compression standard	H.264
Transmission Distance	250m/800ft (LoS)
Antenna Mode	2T2R 2dBi x 2
Pixel Size	0.0639 (H) × 0.0213 (W) mm
Pixel Density	400ppi
Aspect Ratio	16:9
Brightness	500cd/m2
Contrast	1000:1
Viewing Angle	80°/80°(L/R) 80°/80°(U/D)
Input	HDMI
Output	HDMI, 3.5mm audio jack
Power In	DC IN 12V
Power Out	DC 8V
HD Input/ Output Support Format	<p>When the wireless module is on 480P,576i,576P,720P60/59.94/50, 1080i50/59.94/60 1080p23.98/24/25/29.97/30/50/59.97/60</p> <p>When the wireless module is off 480P,576i,576P,720P60/59.94/50, 1080i50/59.94/60 1080p23.98/24/25/29.97/30/50/59.97/60 4K UHD 3840×2160p (30/29.97/25/24/23.98Hz) DCI 4K 4096×2160p (24Hz)</p>
Power Input Voltage	7 ~ 24V
Power Consumption	≤18W
Mounting option	1/4" thread
Dimension	148Lx93Hx20W (mm)
Net Weight	370g (TX), 370g (RX)
Operating Temperature	-20°C ~ 55°C
Storage Temperature	-30°C ~ 65°C

Shipping dimensions

Outside (L x W x H)	cm: 24 x 18.3 x 8.4 inch: 9.4 x 7.2 x 3.3
Weight	kg: 2.0 lbs: 4.4