

Thunder

Excellent Non-Line-Of-Sight Transmission Performance

Model:7074+3074

- Excellent non-line-of-sight transmission performance
- Ultra-long distance range up to 1 KM (LOS)
- Ultra-low video transmission latency to 70 ms
- Up to 1080p60
- Support audio Line-in and Line-out
- Support Tally, RS232/422 control signals
- Support SDI & HDMI in, dual SDI out and SDI loop out



Thunder V-mount



Thunder NPF-type

Through Wall Ability

Range

1000m

Ultra Low Latency

Line In/Out

SDI

HDMI

FullHD


1080P

High Definition

RTSP

Streaming

Thunder Application Diagram

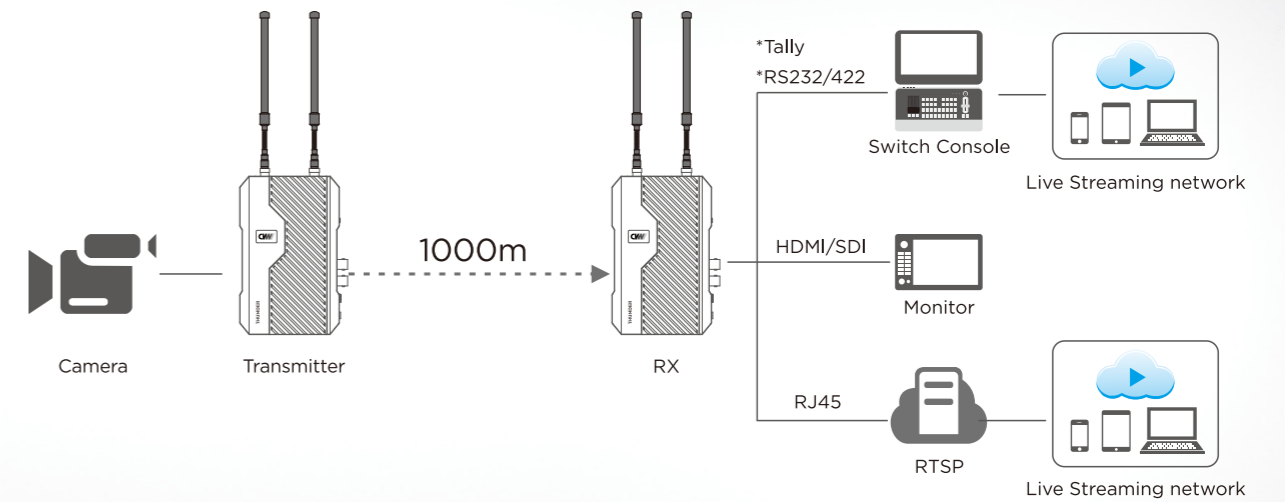

ITEM	Transmitters: 7074/7074A	Receiver:3074/3074A
Antenna Mode	2x2 MIMO	
Operating Frequency	700MHz/ 800MHz(7074A+3074A), 1.4GHz(7074+3074)	
HDMI Protocol	HDMI 1.3; HDMI 1.4	
SDI Protocol	SMPTE 424M, SMPTE 296M, SMPTE 274M	
Interface	HDMI, 3G-SDI, Tally, SDI loop out, Line in, RJ45, RS232/422	RS232/422, Tally, HDMI, 3G-SDI*2, RJ45, Line out
Transmission Distance	1000 m/ 3280 ft(NLOS)	
Operating Voltage	7V-36V	
Power Consumption	12W	7W
Power Supply	DC12V/2A	