

BeamLink-Duo Plus


2-Channel Wireless Video Transmission System

Model: 7060*2 + 3062

- Support 2-channel wireless video and audio transmission
- 4*4 MIMO and Beamforming technologies enhance immunity to interference and extend the wireless coverage
- Up to 1000 m / 3200 ft transmission range (LoS)
- H.265 encoding and decoding
- The system can transmit 1080p 60fps video with less than 70ms latency
- Auto channel switch, auto or manual channel scan function
- Support SDI, HDMI and RTSP streaming output simultaneously
- The system can improve the wireless coverage by adopting the panel antenna
- Support Tally and PTZ camera control functions




Product Interfaces

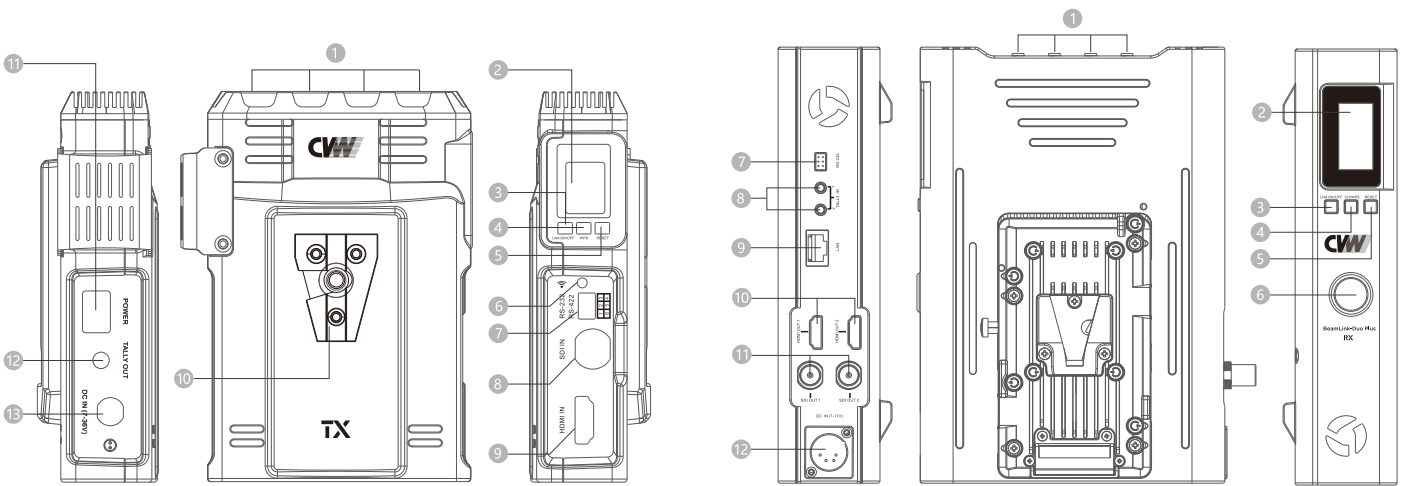

- | | | | | | | | | |
|--------------------------------------|----------------|---------------------|--------------|----------------|----------------------|----------------|---------------------|-----------------|
| ① Antenna Connectors | ② OLED Display | ③ LNA ON/OFF Button | ④ WPS Button | ⑤ RESET Button | ① Antenna Connectors | ② OLED Display | ③ LNA ON/OFF Button | ④ CH/WPS Button |
| ⑥ Networking & Low-Battery Indicator | ⑦ RS232/422 | ⑧ SDI IN | ⑨ HDMI IN | ⑩ V-MOUNT Slot | ⑤ RESET Button | ⑥ Power Button | ⑦ RS232/422 | ⑧ TALLY IN |
| ⑪ Power Switch | ⑫ TALLY OUT | ⑬ DC IN | | | ⑨ LAN Port | ⑩ HDMI OUT | ⑪ SDI OUT | ⑫ DC IN |



Application Diagram

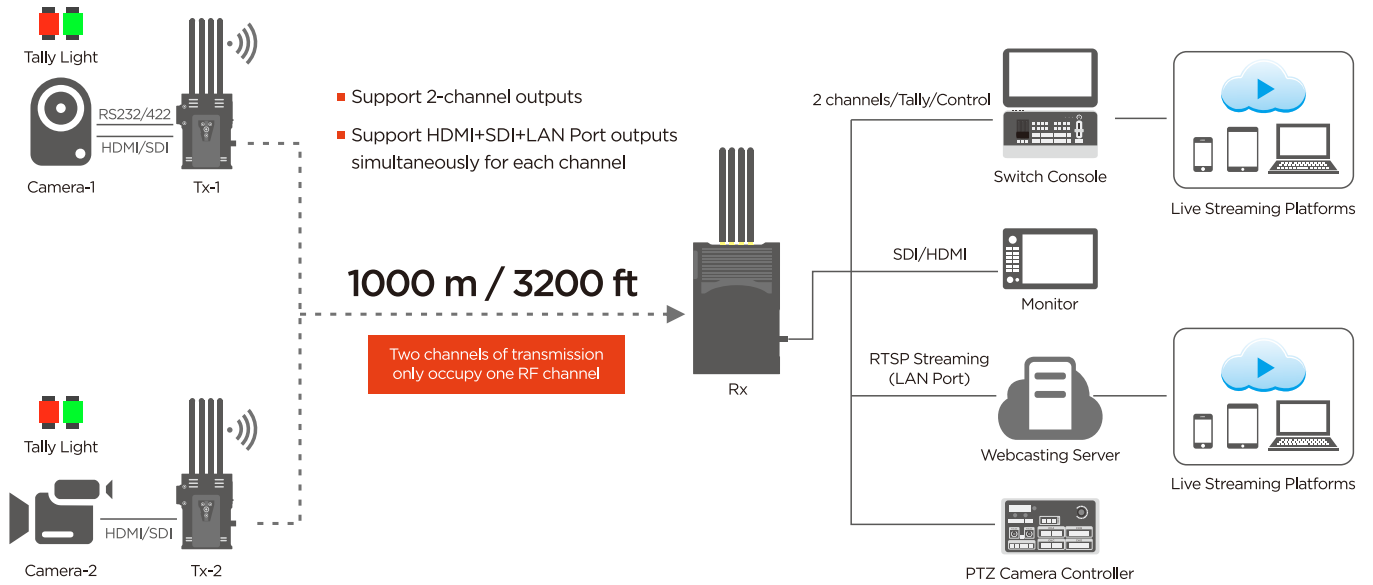

Item	Transmitter:7060*2	Receiver:3062
Antenna	4*4 MIMO, 5dBi External Antenna	
Operating Frequency	5.1-5.8 GHz	
Channel Bandwidth	40 MHz	
Video Resolution	1080P 23.98/24/25/29.97/30/50/59.94/60, 1080I 50/59.94/60 720P 50/59.94/60	
Input/Output	HDMI*1, 3G-SDI*1, Tally*1, RS232/422*1	HDMI*2, 3G-SDI*2, Tally*1, RS232/422*1, LAN Port*1
Transmit Power	17dbm (per antenna)	Receiving Sensitivity: ≤-70dBm
Transmission Range	1000 m/ 3200 ft(LoS)	
Audio Format	AAC	
Video Compression Format	H.265	
Operating Voltage	7V-17V	7V-36V
Operating Power Supply	DC 12V/2A	DC 12V/3A
Power Consumption	MAX 10W	MAX 13W
Product Size(mm)	94(L)*39(W)*126(H)	139(L)*52(W)*199(H)
Temperature	-10°C ~ 50°C(Working);-20°C-80°C(Storage)	

Packing List



SHENZHEN CRYSTAL VIDEO TECHNOLOGY CO.,LTD

ADD: F12,F518 Idea Land,Baoyuan Road,Baoan Central Area,Shenzhen,China

Post code: 518102

Tel: +86-755-27750518-6652

E-mail: Sales@cv-hd.com

www.cv-hd.com

Fax: +86-755-29188427

E-mail: Marketing@cv-hd.com